




1.3M HD CAMERA

CS-20XXMT / MA



- HD
- WDR color CMOS
- Metal case
- Waterproof (IP69K)
- 6 pcs of IR LEDs for night
- Photo sensor
- Compact size
- Various viewing angle

Resolution
1280x720



IR LEDs for night



Parking Line (Option)



WDR Infrared rearview camera has wide visual field and prevent accident in the rear of vehicle by realtime clean image even night.



Day

Cloudy

Night

MODEL NAME & VIEW ANGLE



CS-2004MT/MA
60(H) / 35(V) / 69(D)



CS-2009MT/MA
89(H) / 52(V) / 103(D)



CS-2012MT/MA
118(H) / 67(V) / 137(D)




CS-2015MT/MA
154(H) / 87(V) / 177(D)




CS-2018MT/MA
196(H) / 124(V) / 232(D)

DIMENSIONS & CABLE

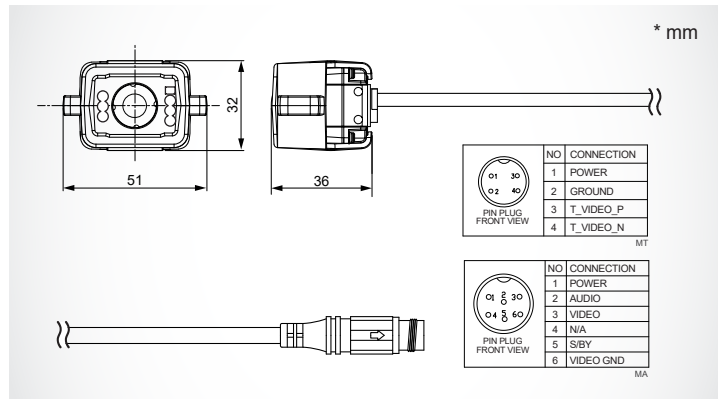

CABLE CONNECTION

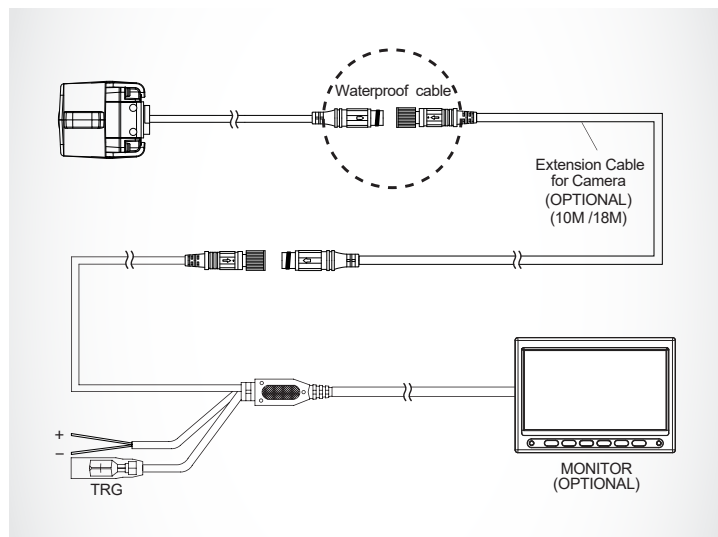

SPECIFICATION

IMAGE DEVICE		1.3M WDR SENSOR 1/3"	
IMAGE PIXEL SIZE		3.75µm (H) x 3.75µm (V)	
RECORDING PIXEL		1,280(H) x 720(V) 1.2MPixel	
SIGNAL FORMAT		HD	
ASPECT RATIO		16:9	
FRAME RATE		30fps	
SCAN MODE		Progressive	
TV SYSTEM		NTSC TV SYSTEM	
IMAGE FREQUENCY	HORIZONTALITY	15,734KHz	
	VERTICAL	59,94Hz	
VIDEO OUT		HD video-out	
HORIZONTAL RESOLUTION		1000 TV Lines	
S/N RATIO		More Than 50dB (AGC OFF)	
WHITE BALANCE		Auto	
OUTPUT	VIDEO PORTS	(MT)Exclusive 4 pin connector	(MA)Exclusive 6 pin connector
	VIDEO TYPE	MIRROR OR NORMAL	
MIC		X	
IR LED / PHOTO SENSOR		IR 6ea / Photo sensor 1ea / 850nm (RED)	
VIEW ANGLE	CS-2004MT/MA	60(H) / 35(V) / 69(D)	
	CS-2009MT/MA	90(H) / 52(V) / 103(D)	
	CS-2012MT/MA	118(H) / 67(V) / 137(D)	
	CS-2015MT/MA	154(H) / 87(V) / 177(D)	
	CS-2018MT/MA	196(H) / 124 (V) / 232(D)	
MIN. ILLUMINATION		IR ON 0Lux	
INPUT VOLTAGE		DC 12-24V (MAX 30V)	
OPERATING TEMPERATURE		-20°C ~ 70°C	
STORAGE TEMPERATURE		-30°C ~ 80°C	
WATERPROOF		IP69K	
DIMENSION		51(W) x 32(H) x 36(D)mm (w/o Bracket)	
WEIGHT		85g (W) (w/o Bracket)	
CABLE LENGTH		1.0m	
BOX CONTENTS	BRACKET - SUNVISOR	0	
	SCREWS SET	0	
	EXTENSION CABLE	Option	
	MANUAL	0	