

4CH DRIVING VIDEO RECORDER

DR-400N

- 960H, VGA, CMOS, CCD (9V~12V)
- Various options for recording
- Cover lock system
- DC 12V~24V (Max. 32V)
- Metal Case



2.5" SSD Type





RECORDING TIME

※ Calculated data.

SSD	128 GB	256 GB	512 GB
960 x 480(Normal)	90 hours	180 hours	360 hours
1920 x 960 (High)	37 hours	74 hours	148 hours

PC VIEWER MANAGER
1920 x 960 or 960 x 480

INSTALLATION (EXAMPLE)

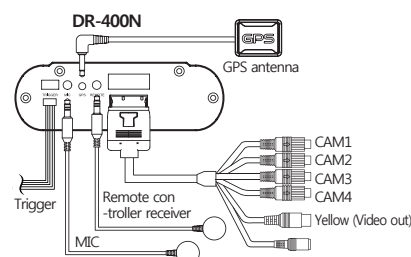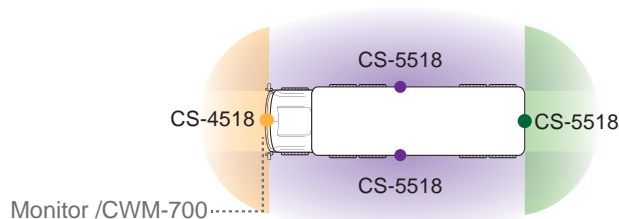

SPECIFICATIONS



DR-400N

FRAME	4Channels (30fps)	C-MIC	External C-MIC
MODE	Normal / Event	TRIGGER	4EA
V-OUT	O	PC VIEWER	O
COMPRESSION	H-264 / AVI	POWER	DC12V - 24V max.32V
MEMORY	SSD (Min.128GB ~ Max.1TB)	OPERATING TEMP.	-10°C ~ 60°C
GPS	External	DIMENSION (W/H/D)	129.5x42.5x166.5 mm
3G-SENSOR	Internal (5step)	WEIGHT	586g



CWM-700

SCREEN SIZE	7 Inch	AUDIO SIGNAL	MONO
RESOLUTION	WVGA 800(W) x 3(RGB) x 480(H)	BUTTON	(Remote Sensor) Dimmer / Mode / Down / Up / Left / Right / Menu / Power
BRIGHTNESS	400 cd	OPERATING TEMP.	-30°C ~ 70°C
CONTRAST RATIO	500 : 1	DIMENSION (W/H/D)	181 x 134 x 28 mm
POWER SUPPLY	DC12V-24V / 450mA DC12V	WEIGHT	860g

CS-4512/15/18
(Front/Side/Rear)

VIEW ANGLE	[CS-4512] 120(H) / 89(V) / 160(D) [CS-4515] 150(H) / 92(V) / 177.5(D) [CS-4518] 180(H) / 125(V) / 210(D)	OPERATING TEMP.	-20°C ~ 65°C
PICK-UP DEVICE	1/3" 960H color CMOS	DIMENSION (W/H/D)	22.9 x 22.9x26.3mm (without bracket)
MIN. ILLUMINATION	0.5Lux (F=2.4)	WEIGHT	38g (without bracket)
RESOLUTION	700 TV Lines		
INPUT VOLTAGE	DC 5V-12V		

CS-5512/15/18
(Side/Rear)

VIEW ANGLE	[CS-5512] 120(H) / 89(V) / 160(D) [CS-5515] 150(H) / 92(V) / 177.5(D) [CS-5518] 180(H) / 125(V) / 210(D)	OPERATING TEMP.	-20°C ~ 65°C
PICK-UP DEVICE	1/3" 960H color CMOS	DIMENSION (∅x D)	28 x 29.8mm
MIN. ILLUMINATION	0.5Lux (F=2.4)	WEIGHT	34.5g (with bracket)
RESOLUTION	700 TV Lines		
INPUT VOLTAGE	DC 5V-12V		