

5" LIGHT-DUTY DIGITAL MONITOR

CM-562


- 8bit MICRO controller
- TFT LCD with high resolution and low reflection
- All functions are displayed on screen (OSD function)
- PWM volume control
- Mode selection function
- Low energy consuming rate
- Language Display Selection (KOR-JPN-GER-ENG-SPA-FRE-ITA)
- 1 Cable solution
- Free voltage (From DC 12V to DC 24V)
- Dimmer selection function



SPECIFICATION

SCREEN SIZE	5.6 Inch	VIDEO SIGNAL	Composite Video 75Ω 1Vp-p
RESOLUTION	640(W) x 3(GB) x 480(H)	AUDIO SIGNAL	MONO
BRIGHTNESS	350 cd	BUTTON	Power / Mode / Menu / Up / Down
CONTRAST RATIO	500 : 1	OPERATING TEMPERATURE	-30°C ~ 70°C
VIEW ANGLE (L/R/T/B)	70/ 70/ 50/ 70	DIMENSION (W x H x D)	163 x 112 x 30 mm
POWER SUPPLY	DC12V-24V / 450mA	WEIGHT	280g (monitor only)
INPUT SYSTEM	AUTO (NTSC/PAL)		

FUNCTION OF EACH PART

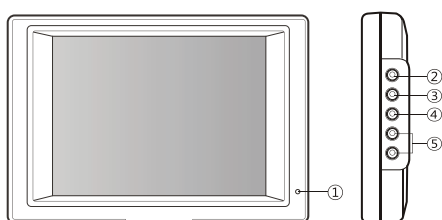

1. S/BY LED	Power or Stand-by status display
2. POWER	Power ON/OFF button
3. MODE	CAM1/CAM2/AV selection function
4. MENU	SETUP/PICTURE selection function
5. UP/DOWN	SOUND/MENU level control

CONNECTION

