

7" LIGHT-DUTY DIGITAL MONITOR

CM-709M2


- Touch Button (LED type)
- Max. 4 cameras input
- User can choose split screen (2/ 3/ 4 / H Split screen)
- 7 Languages display selection (ENG-DEU-ITA-FRA-ESP-KOR-JPN)
- Free voltage (DC 12~24V)



SPECIFICATION

SCREEN SIZE	7 Inch	VIDEO SIGNAL	Composite Video signal
RESOLUTION	800(W) x 3(GB) x 480(H)	AUDIO SIGNAL	MONO
BRIGHTNESS	400 cd/m ²	BUTTON	(Remote Sensor) AV / Mode / Down / Up / Menu / Power
CONTRAST RATIO	500 : 1	OPERATING TEMPERATURE	-30°C ~ 70°C
VIEW ANGLE (L/R/U/D)	70/ 70/ 50/ 70	DIMENSION (W x H x D)	174 x 125 x 27 mm (Monitor Only)
POWER SUPPLY	DC12V-24V	WEIGHT	440g (Monitor Only)
INPUT SYSTEM	AUTO (NTSC/PAL)		

FUNCTION OF EACH PART

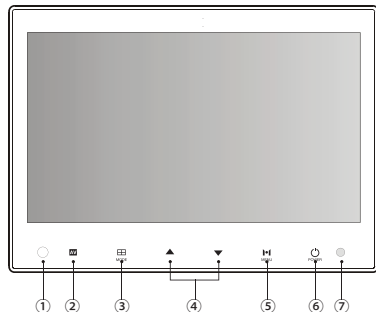

① SENSOR	IR-SENSOR for remote control signal
② AV	Switch AUX
③ MODE	Switch Screen / Select SUB-MENU
④ ▲/▼	Switch camera inputs / Select split mode / Volume control / Set SUB-MENU
⑤ MENU	Switch main menu
⑥ POWER	Power ON / Stand-by
⑦ DIMMER SENSOR	Automatic brightness control sensor

CONNECTION

