

5" WATERPROOF MONITOR

CWM-501


- Water Resistant (IP67) Aluminum housing
- All functions are displayed on screen (OSD function)
- 6 Languages display selection (EN-DE-IT-FR-ES-JP)
- Picture quality control (PWM control)




SPECIFICATION

SCREEN SIZE	5 Inch	VIDEO SIGNAL	Composite Video (CVBS)
RESOLUTION	800 x 3(RGB) x 480	AUDIO SIGNAL	MONO
BRIGHTNESS	500 cd/m ²	BUTTON	DIM, LEFT, RIGHT, MODE, MENU, POWER
CONTRAST RATIO	700 : 1	OPERATING TEMPERATURE	-10°C ~ 60°C
VIEW ANGLE (L/R/T/B)	70 / 70 / 50 / 70	DIMENSION (W x H x D)	154 x 121 x 23.5 mm
POWER SUPPLY	DC 12V ~ 24V	WEIGHT	575g (monitor only)
INPUT SYSTEM	AUTO(NTSC/PAL)		

CONNECTION

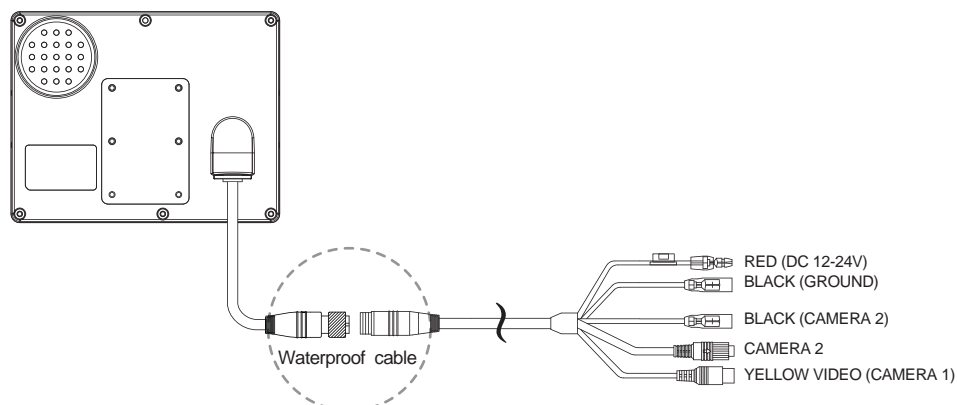


FUNCTION OF EACH PART

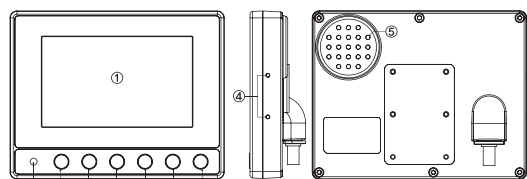


1. LCD SCREEN	WVGA (800x480)
2. STAND BY LED	Stand by lamp
3. BUTTONS	DIMMER, LEFT, RIGHT, MODE, MENU, POWER
4. SUN VISOR HOLE	Sun Visor installation hole
5. SPEAKER HOLE	Speaker hole (Waterproof)

U-Bracket (Option)



Standard Installation



Ceiling Installation