



# A.I. SAFETY BOX

## A-100



- **A.I. monitoring system can be built with regular cameras and monitors**
- Recognize people, motorcycles, bicycles / buses, trucks (Optional)
- Optimized recognition distance and recognition area (ROI) can be set for each installed vehicle
- Digital zoom (DZoom)
- Video alarm and alarm sound output / External Speaker (Optional)
- High-quality FHD video (1080P) / digital transmission without loss of quality
- Waterproof IP69K
- Automatic Camera Specification Recognition

## SPECIFICATION


|              |  |                   |                                |
|--------------|--|-------------------|--------------------------------|
| RESOLUTION   | 720p/1080p AUTO (TVI, AHD)                           | OPERATING TEMP.   | -20°C ~ 70°C                   |
| DIGITAL ZOOM | 0  | STORAGE TEMP.     | -30°C ~ 80°C                   |
| RECOGNITION  | Person, Bicycle, Motorcycle, Car, Bus, Truck(Select) | INPUT VOLTAGE     | DC12V~24V (MAX. 30V)           |
| TRIGGER      | In 2ea / Out 2ea                                     | DIMENSION (W/H/D) | 91 x 20.5 x 79mm (Device only) |
| WATERPROOF   | IP69K  | WEIGHT            | 264g (Device only)             |

## FUNCTION

\* This is an example image for better understanding.

### RECOGNITION DISTANCE SETTING

Recognition distance can be set according to the user environment, an appropriate safety distance can be secured.

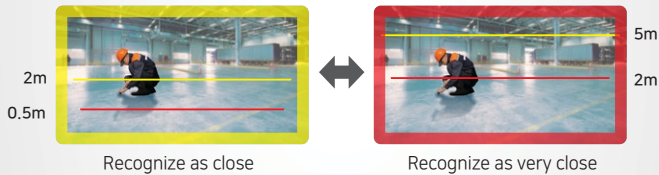


### DIGITAL ZOOM (DZOOM)

You can zoom in on the screen to intensively monitor the area you want.




### RECOGNITION AREA SETTING (ROI)

To prevent unnecessary recognition of vehicle structures, etc, user can set it to recognize only a specific section within the screen.

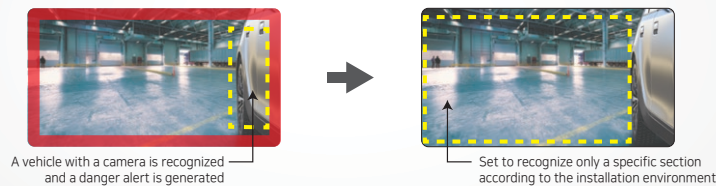

## CONNECTION

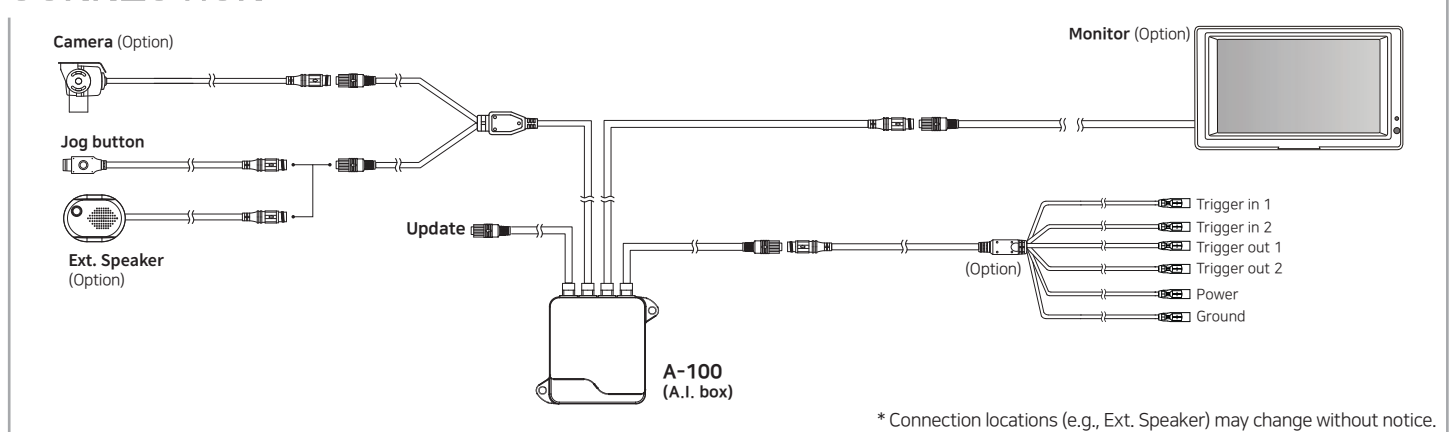

\* Connection locations (e.g., Ext. Speaker) may change without notice.