



HD CAMERA SPLITTER

[Prio 1]

- 2ch Video Input (AHD + AHD)
- 1ch Video Output
- CAM2 priority output when connecting CAM2 while using CAM1

[Prio 2]

- 2ch Video Input (AHD + AHD & CVBS)
- 1ch Video Output
- CAM2 priority output when CAM2 is connected while CAM1 is in use
- Conversion output to AHD when CVBS is input to CAM2




SPECIFICATION

INPUT	Prio 1	2ch (AHD + AHD)	OPERATING TEMP.	-20°C ~ 70°C
	Prio 2	2ch (AHD + AHD & CVBS)	STORAGE TEMP.	-30°C ~ 80°C
OUTPUT		1ch (AHD)	DIMENSION (W/H/D)	91 x 20.5 x 79mm (Device only)
INPUT VOLTAGE		DC12V~15V(*No external power connection, monitor power only)	WEIGHT	164g (Device only)
WATERPROOF		IP69K		

CONNECTION

Prio 1

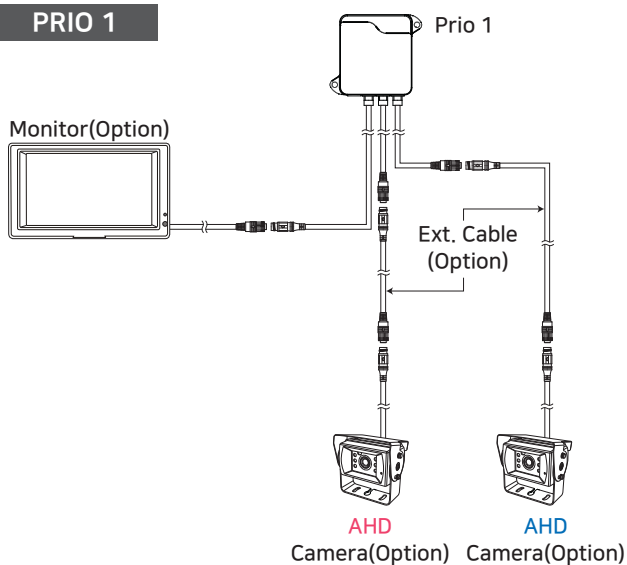

Prio 2

